

PUBLISHED

MAY 25, 1945.

BY A. P. C.

L. ARSANDAUX

SUPPORTING ELEMENTS FOR AIRCRAFTS

Filed May 16, 1940

Serial No.

335,573

2 Sheets-Sheet 1

Fig. 1

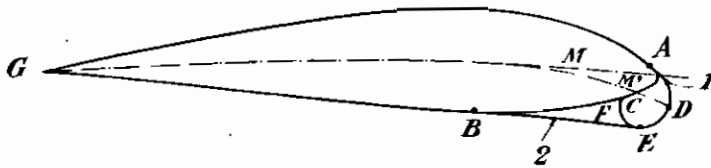


Fig. 2


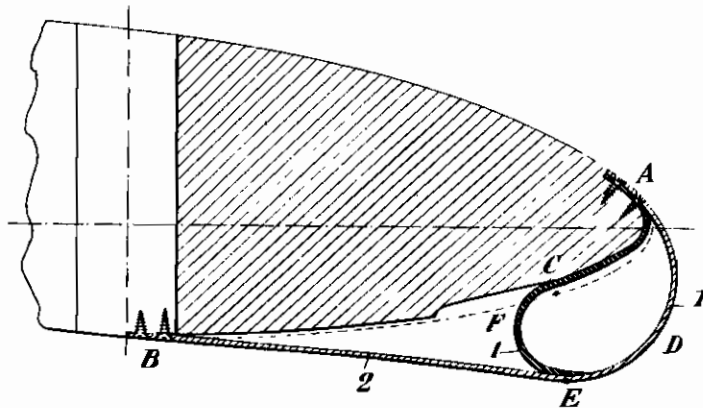


Fig. 3

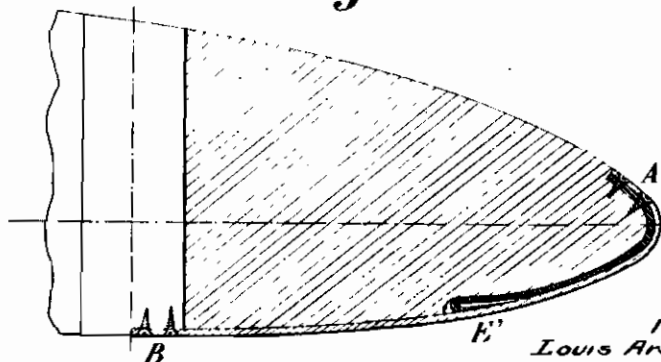

Inventor  
Louis Arsandaux,

By *Bailey Garrison*  
Attorney

PUBLISHED  
MAY 25, 1945.  
BY A. P. C.

L. ARSANDAUX  
SUPPORTING ELEMENTS FOR AIRCRAFTS  
Filed May 16, 1940.

Serial No.  
335,573  
2 Sheets-Sheet 2

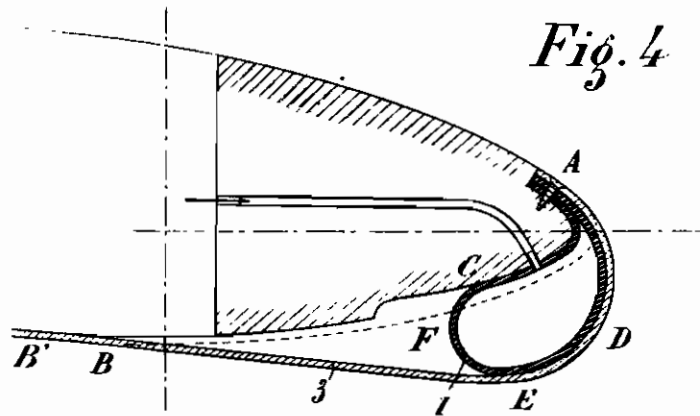


Fig. 4

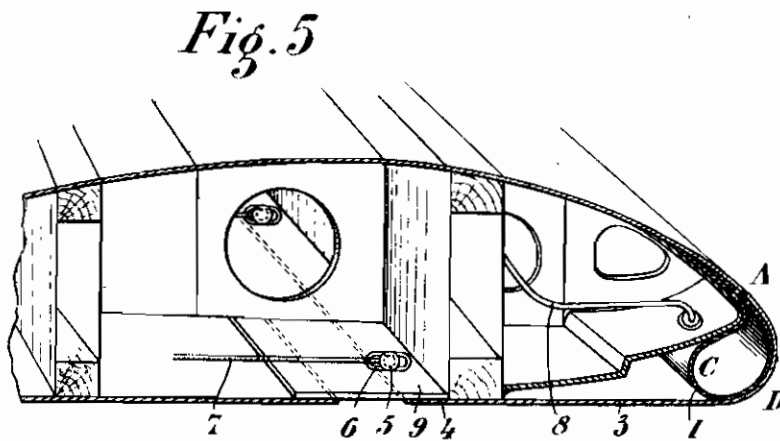


Fig. 5

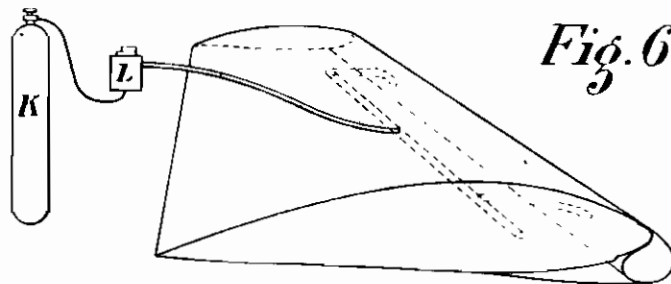


Fig. 6

Inventor  
Louis Arsandaux

By *Bailey & Hanson*  
Attorneys

# ALIEN PROPERTY CUSTODIAN

## SUPPORTING ELEMENTS FOR AIRCRAFTS

Louis Arsandaux, Orleans, France; vested in the  
Alien Property Custodian

Application filed May 16, 1940

The present invention relates to supporting elements, such as wings, for aircrafts, and it is more particularly concerned with devices for deforming the vertical section of such elements, along the leading edge thereof.

The chief object of the present invention is to provide a device of this type which is better adapted to meet the requirements of practice than those used for the same purpose up to the present time, and in particular which permits of improving the lift of the aircraft element, especially the maximum lift thereof, by increasing the curvature of the median line of the aerofoil section, for instance with a view to obtaining a lower landing speed. The device may also act to increase the drag of the aircraft element, in order to brake it.

A particular object of the invention is provide means for deforming the external outline of the wing vertical section without acting on the frame of said wing.

Still another object of the invention is to provide means for deforming the external shape of the wing leading edge without producing sharp angles in the vertical section of the wing thus deformed.

Still another object is to permit a gradual deformation of the wing leading edge.

Still another object of my invention is to permit an elastic deformation of the wing leading edge.

For this purpose, according to an essential feature of the invention, I provide a deformable bag in the leading edge of the wing or other aircraft element, and this bag is more or less inflated through pneumatic means.

Of course, this device can be combined with other means for modifying the aerodynamic properties of the aircraft supporting element, such as a flap, a slot, or the like, or with means for removing ice from the wing surface.

Other features of the present invention will result from the following detailed description of some specific embodiments thereof.

Preferred embodiments of the present invention will be hereinafter described, with reference to the accompanying drawings, given merely by way of example, and in which:

Fig. 1 is a diagrammatical view illustrating the principle of the invention;

Fig. 2 is a vertical sectional view of a particular embodiment, showing the air chamber in the inflated position;

Fig. 3 is a similar view, showing the chamber in the deflated state;

Fig. 4 is a view, similar to Fig. 2, showing another embodiment;

Fig. 5 is a perspective view showing the wing internal arrangement used in connection with the embodiment of Fig. 4;

Fig. 6 is a diagrammatic perspective view, illustrating how compressed air can be fed to the air chamber.

The embodiment illustrated by Fig. 1 includes the following elements:

a.—An air chamber or bag (of course this chamber can contain any gas other than air), the section of which is A D E F C A, made of a fluidtight deformable material, such as a rubberized fabric, which is not extensible, or a sheet of rubber, which is extensible. This chamber or bag is secured at A to the upper side of the wing leading edge;

b.—An envelope 2, extending from B to E, constantly stretched either by its own elasticity or by any suitable elastic return device. The function of this envelope 2 is to urge the air chamber toward the deflated position, without forming plaits or folds on the under side of the leading edge of the wing;

This device will operate in the following manner:

When no gas under pressure is present in chamber 1, the tension transmitted to point E by envelope 2 tends to keep the deformable device applied against the solid structure of the wing. This structure is so designed that the whole thus formed constitutes the normal contour of aerofoil G A C B G, the median line of which is M. This normal shape is thus obtained even in case of leakage of the device.

When a gas under pressure (air) is introduced into chamber 1, it tends to take a shape such as A D E F C A, under the combined effect of the pressure in said bag or chamber 1 and of the reaction of envelope 2. This shape corresponds to another median line M', the curvature of which is greater than that of M.

Figs. 2 and 3 correspond to the case in which part 2 is supposed to consist of an elastic sheet, rigidly fixed at B to the solid structure of the wing and at E to the air chamber 1. In the embodiment of Fig. 2, the chamber is supposed to be inflated to the utilization pressure, while Fig. 3 shows the same device in the state of rest, corresponding to normal flight conditions.

Figs. 4 and 5 correspond to the case in which wall 2 is supposed to consist of an element 3 which is not extensible. This element 3 envelopes the whole of air chamber 1, and it is rigidly fixed

at A to the frame of the wing on the upper side of the leading edge and elastically urged at B' toward the rear of the under side of the wing.

In Fig. 5, I have shown a perspective of the inside of the wing, intended to show how the return means are adapted to act on element 3. A rigid flat bar, or blade 4 is fixed to the rear edge of element 3. It is provided with pins 5, which are urged rearwardly by elastic cables 7. These pins extend through guiding slots 6 provided in an element 9 of the wing frame, this element covering the slot which exists in the structure when the air chamber is to be inflated with air under pressure.

The desired pressure is produced in air chamber 1 by feeding thereto a certain amount of air under pressure from any suitable source, for instance a bottle, as shown by Fig. 6, preferably with the interposition of a pressure relief device L, adapted to work between a maximum and a minimum, the limits depending upon the kinematic characteristics of the aircraft.

Of course, any other source of gas under pressure may be used according to the present invention.

LOUIS ARSANDAUX.